

**DIGITAL ELECTRIC
TOWEL RAILS**

T Series

CHROME

METAL

WHITE



Class II


T Series

**DRESS YOUR BATHROOM
IN FASHION**




**ELEGANCE,
COMFORT & STYLE**







FT12V1

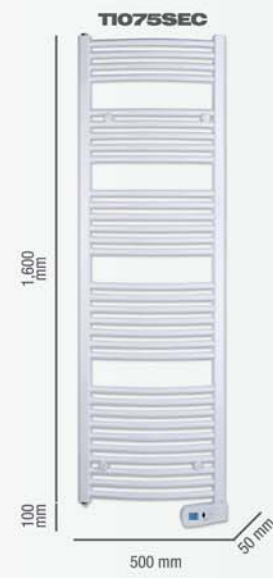


T SERIES WHITE
RANGE OF PRODUCTS

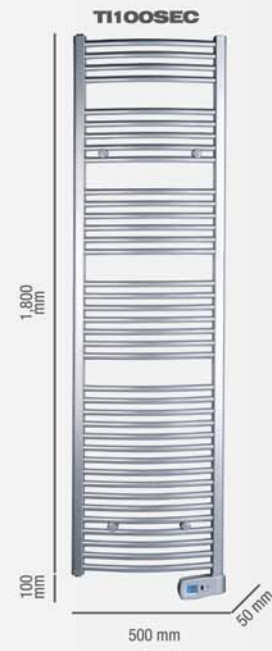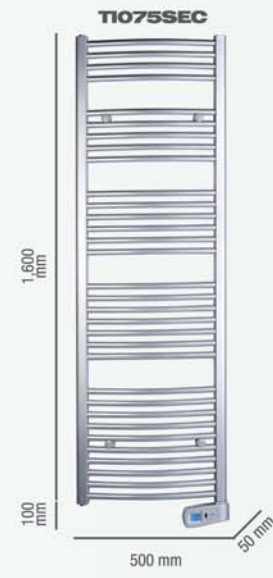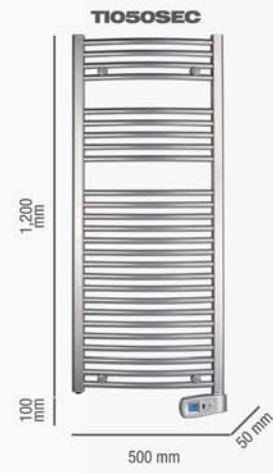

T SERIES METAL
RANGE OF PRODUCTS

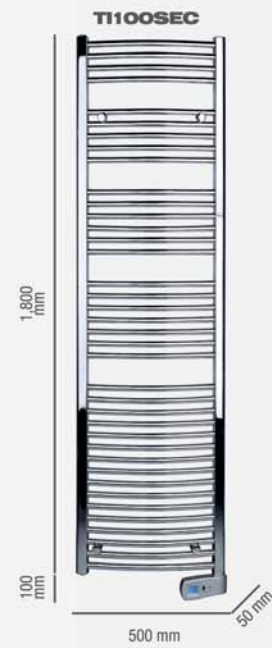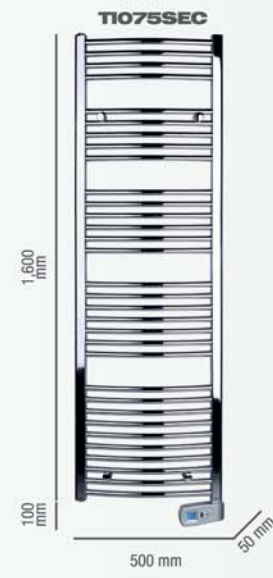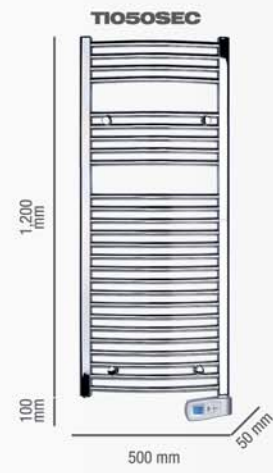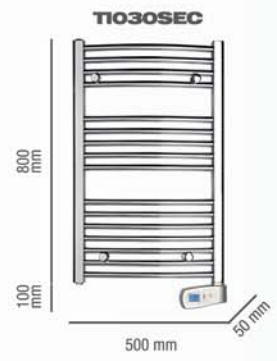

T SERIES CHROME
RANGE OF PRODUCTS



T Series
chrome
T SERIES CHROME
CHARACTERISTICS



T Series
metal / white
T SERIES METAL/WHITE
CHARACTERISTICS

| MODELS | Chrome | TI030SEC | TI050SEC | TI075SEC | TI100SEC |
|--|--------|----------|----------|----------|----------|
| DIMENSIONS | | | | | |
| Height (mm) -without control panel- | | 800 | 1,200 | 1,600 | 1,800 |
| Height (mm) -with control panel- | | 900 | 1,300 | 1,700 | 1,900 |
| Width (mm) | | 500 | 500 | 500 | 500 |
| Depth (mm) | | 50 | 50 | 50 | 50 |
| Installed depth (mm) | | 100 | 100 | 100 | 100 |
| MECHANICAL CHARACTERISTICS | | | | | |
| Steel heating element | | ✓ | ✓ | ✓ | ✓ |
| Thermal fluid | | ✓ | ✓ | ✓ | ✓ |
| ASA/PC Control Panel | | ✓ | ✓ | ✓ | ✓ |
| Weight (kg) | | 11 | 15 | 22 | 28 |
| Chromed finish for improved thermal performance | | ✓ | ✓ | ✓ | ✓ |
| ELECTRICAL CHARACTERISTICS | | | | | |
| Nominal power (W) | | 300 | 300 | 500 | 750 |
| Voltage (V) | | 230 V ~ | 230 V ~ | 230 V ~ | 230 V ~ |
| Current (A) | | 1.3 | 1.3 | 2.2 | 3.3 |
| Class II | | ✓ | ✓ | ✓ | ✓ |
| FUNCTIONS | | | | | |
| Digital Display | | ✓ | ✓ | ✓ | ✓ |
| Manual / Automatic Function | | ✓ | ✓ | ✓ | ✓ |
| ECO / Comfort Modes | | ✓ | ✓ | ✓ | ✓ |
| Anti-frost | | ✓ | ✓ | ✓ | ✓ |
| Programmable 7 days / 24 hours from the towel rail control panel | | ✓ | ✓ | ✓ | ✓ |
| Compatible with M Series remote | | ✓ | ✓ | ✓ | ✓ |
| Working mode indicator | | ✓ | ✓ | ✓ | ✓ |
| Boost mode (2H) | | ✓ | ✓ | ✓ | ✓ |
| SAFETY | | | | | |
| Fireproof silicon covering on wires | | ✓ | ✓ | ✓ | ✓ |
| Protection grade | | IP 44 | IP 44 | IP 44 | IP 44 |
| Safety thermostat | | ✓ | ✓ | ✓ | ✓ |
| INSTALLATION | | | | | |
| Template | | ✓ | ✓ | ✓ | ✓ |
| Installation kit | | ✓ | ✓ | ✓ | ✓ |
| Recommended sizing (m ²) | | Up to 2 | Up to 4 | Up to 6 | Up to 8 |
| CERTIFICATIONS | | | | | |
| 2004/108/CE Electromagnetic Compatibility | | ✓ | ✓ | ✓ | ✓ |
| 2006/95/CE Electrical Safety | | ✓ | ✓ | ✓ | ✓ |

| MODELS | White | TI030SEB | TI050SEB | TI075SEB | TI100SEB |
|--|-------|----------|----------|----------|----------|
| | Metal | TI030SEM | TI050SEM | TI075SEM | TI100SEM |
| DIMENSIONS | | | | | |
| Height (mm) -without control panel- | | 800 | 1,200 | 1,600 | 1,800 |
| Height (mm) -with control panel- | | 900 | 1,300 | 1,700 | 1,900 |
| Width (mm) | | 500 | 500 | 500 | 500 |
| Depth (mm) | | 50 | 50 | 50 | 50 |
| Installed depth (mm) | | 100 | 100 | 100 | 100 |
| MECHANICAL CHARACTERISTICS | | | | | |
| Steel heating element | | ✓ | ✓ | ✓ | ✓ |
| Thermal fluid | | ✓ | ✓ | ✓ | ✓ |
| ASA/PC Control Panel | | ✓ | ✓ | ✓ | ✓ |
| Weight (kg) | | 11 | 15 | 22 | 28 |
| RAL colour | White | 9016 | 9016 | 9016 | 9016 |
| | Metal | 9006 | 9006 | 9006 | 9006 |
| ELECTRICAL CHARACTERISTICS | | | | | |
| Nominal power (W) | | 300 | 500 | 750 | 1,000 |
| Voltage (V) | | 230 V ~ | 230 V ~ | 230 V ~ | 230 V ~ |
| Current (A) | | 1.3 | 2.2 | 3.3 | 4.4 |
| Class II | | ✓ | ✓ | ✓ | ✓ |
| FUNCTIONS | | | | | |
| Digital Display | | ✓ | ✓ | ✓ | ✓ |
| Manual / Automatic Function | | ✓ | ✓ | ✓ | ✓ |
| ECO / Comfort Modes | | ✓ | ✓ | ✓ | ✓ |
| Anti-frost | | ✓ | ✓ | ✓ | ✓ |
| Programmable 7 days / 24 hours from the towel rail control panel | | ✓ | ✓ | ✓ | ✓ |
| Compatible with M Series remote | | ✓ | ✓ | ✓ | ✓ |
| Working mode indicator | | ✓ | ✓ | ✓ | ✓ |
| Boost mode (2H) | | ✓ | ✓ | ✓ | ✓ |
| SAFETY | | | | | |
| Fireproof silicon covering on wires | | ✓ | ✓ | ✓ | ✓ |
| Protection grade | | IP 44 | IP 44 | IP 44 | IP 44 |
| Safety thermostat | | ✓ | ✓ | ✓ | ✓ |
| INSTALLATION | | | | | |
| Template | | ✓ | ✓ | ✓ | ✓ |
| Installation kit | | ✓ | ✓ | ✓ | ✓ |
| Recommended sizing (m ²) | | Up to 3 | Up to 5 | Up to 7 | Up to 10 |
| CERTIFICATIONS | | | | | |
| 2004/108/CE Electromagnetic Compatibility | | ✓ | ✓ | ✓ | ✓ |
| 2006/95/CE Electrical Safety | | ✓ | ✓ | ✓ | ✓ |