

Gabarrón



TBB

TOWEL RAIL

TBB 8i
TBB 12i
TBB 17i

. Please read these instructions carefully before installing or using this appliance for the first


1. IMPORTANT INFORMATION

- The warranty of the towel rail will not cover any damage caused by the non observance of any of these instructions.
- Please read these instructions before installing or using this appliance for the first time. This guide must be kept and given to any new user.
- Please, check that the voltage in the rating label fits the power supply.
- The surfaces of the towel rail can be hot and caution is advised when small children are near the appliance.
- **Warning: In order to avoid a hazard for very young children, this appliance should be installed so that the lowest heated rail is at least 600 mm above the ground.**
- Before carrying out any work inside the appliance, the towel rail must be disconnected from the electricity supply.
- The use of electric towel rails is forbidden in any area where there is a presence of gases, explosives or inflammable objects.
- The towel rail should not be installed exactly under an electric outlet.
- The appliance must be installed in such a way that it is impossible for anyone using a bath or shower, to touch the controls.
- The installation must be carried out in accordance with the current electrical regulations.
- The supply lead must not contact the surface of the towel rail.
- If the supply lead of the towel rail is damaged it must be replaced by service personnel authorized by the manufacturer, since special tools are needed.
- The presence of air particles of smoke, dust and other pollutants could, in time, discolour the walls and surfaces around the towel rail.
- All the models incorporate a safety device. This will disconnect the towel rail if for some reason it fails. If the safety device activates the towel rail will need to be repaired by service personnel authorized by the manufacturer.

2. INSTRUCTIONS FOR INSTALLATION

The towel rail is designed to only work in a vertical position and fixed to the wall, never to the ceiling.


The fixation to the wall is carried out by means of the supports given with the appliance, according to the following outline.

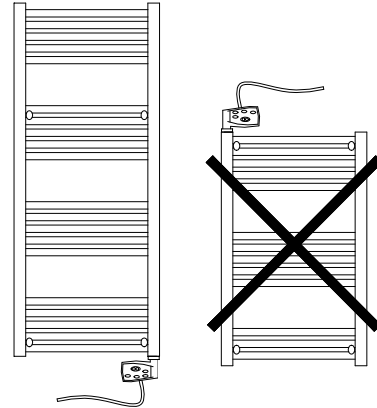

A clear distance of 5 cm must be allowed around the towel rail.


Cable exit always on the lower right side.

The towel rail supports should be placed in sequence as indicated below:

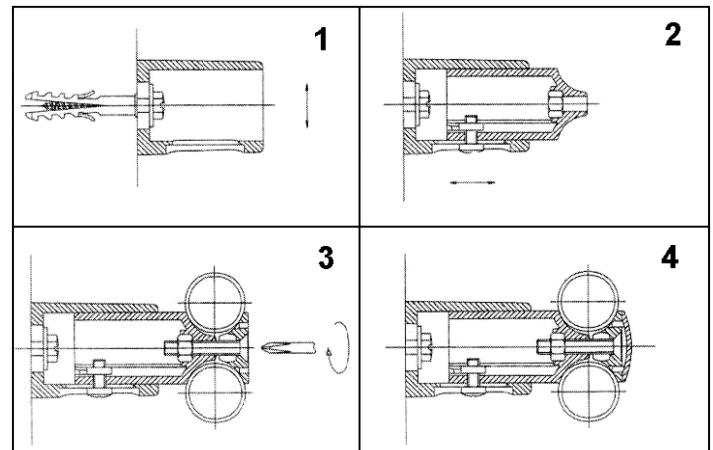





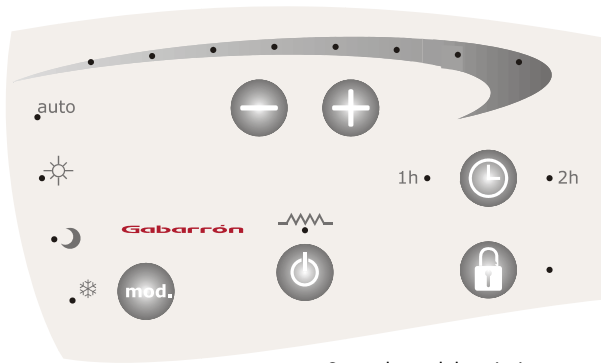




Connect the wires to a fix wall socket or to an appropriate plug **WITHOUT EARTH**. Connect the black wire marked "Fil Pilote" to the signal wire when available. Do not connect this wire to any EARTH lead.

3. APPLICATION OF USE



Control panel description

-  Press this key to turn ON / OFF the towel rail.
-  Press these keys to adjust the temperature, the scale at the top will show you the temperature level.
-  Press this key to select the working mode. The LED will show you the selection:
 - auto “auto” mode, only available for installations with FIL PILOTE. For standard applications this mode is the same as CONFORT mode.
 -  CONFORT mode. It will keep the selected temperature level.
 -  ECONOMY mode. It will reduce the CONFORT mode by 3.5°C
 -  FROST PROTECTION mode. It will keep a minimum temperature of 7°C.
 -  This LED will show you that the device is consuming energy.
 -  By pressing this key more than three seconds, the keyboard will be locked to avoid accidental handling. To unlock the keyboard it will be necessary to press this key again another three seconds.
 -  Press this key one or two times to set up one or two hours of continuous performance at maximum heat. After this time the heater will come back to the previous selected mode. The timed performance can be also interrupted by pressing again this key.

It is usual that the extreme bars at the towel heater be at different temperature than the rest of the bars, this is because of the internal temperature distribution.

4. MAINTENANCE

The towel rail doesn't require any type of special maintenance. Clean it with a cloth, only when the unit is disconnected and cold. Do not use solvents or abrasive products when cleaning.


The towel rail is filled with a precise quantity of special fluid. Any repairs that may require the opening of the towel rail must only be carried out by the manufacturer.

The towel rail has been manufactured to assured quality and according to processes to protect the environment. Once at the end of the useful life of the appliance, take it to a clean point so that it's materials can be recycled appropriately.

5. WIRING DIAGRAM

Models: TBB8i (300 W)
TBB12i (600 W)
TBB17i (900 W)

Voltage: 230 - 240 V~ / Class II / IP 44 / IK 09

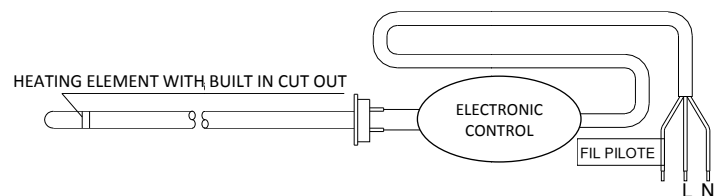

WARNING: Connect the wires to a fix wall socket or to an appropriate plug **WITHOUT EARTH**. Connect the black wire marked “Fil Pilote” to the signal wire when available. Do not connect this wire to any EARTH lead.



The symbol on the product or in its packaging indicates that this product may not be treated as household waste. Instead it shall be handed over to the applicable collection point for the recycling of electrical and electronic equipment. By ensuring this product is disposed of correctly, you will help prevent potential negative consequences for the environment and human health, which could otherwise be caused by inappropriate waste handling of this product. For more detailed information about recycling of this product, please contact your local city office, your household waste disposal service or the shop where you purchased the product. These instructions are only valid in the EU member states.



ELNUR UK LTD
Unit 1 Brown Street North
Leigh, Lancashire, WN7 1BU

Tel. **01942 670119** - Sales
Tel. **01942 265048** - Technical

www.elnur.co.uk
www.elnur.es
www.elnur-global.com



As a part of the policy of continuous product improvement Elnur UK Ltd reserves the right to alter specifications without notice.